

BELLMOUTH | PN16

Automated Environmental Systems offers a wide range of flanged ductile iron fittings with epoxy coating both internally and externally

Product Description:

Bellmouth with fixed flange, suitable for potable water and sewage applications, providing long-term reliable performance

Features:

- Design: EN 545 potable water / EN 598 water and sewage
- Manufacturing: ISO 2531
- Thickness: Class K-12/14
- Flange drilling: ISO 7005-2
- Pressure rating: PN16
- Coating: Fusion Bonded Epoxy / 250 Microns

EN 545


Potable Water



EN 598

Water & Sewage



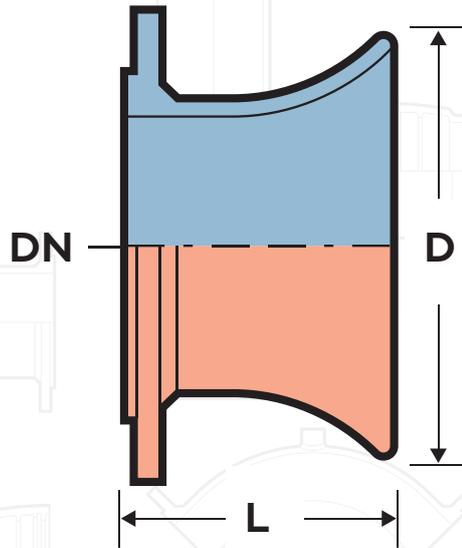

KEY DIMENSIONS

DN (mm)	Flange Drilling	L	D	Weight (Kg)
80	PN16	135	160	5.0
100	PN16	140	185	6.0
150	PN16	155	245	10.0
200	PN16	170	310	15.0
250	PN16	190	370	21.0
300	PN16	210	435	29.0
350	PN16	225	495	39.0
400	PN16	245	560	50.0
450	PN16	260	620	63.0
500	PN16	280	685	83.0
600	PN16	300	810	122.0
700	PN16	340	945	154.0
800	PN16	380	1055	203.0
900	PN16	420	1165	250.0