

CROSS | PN16

Automated Environmental Systems offers a wide range of flanged ductile iron fittings with epoxy coating both internally and externally

Product Description:

All flanged cross, suitable for water and sewage, providing long-term reliable performance

Features:

- Design: EN 545 clean water / EN 598 water and sewage
- Manufacturing: ISO 2531
- Thickness: Class K-12/14
- Flange drilling: ISO 7005-2
- Pressure rating: PN16
- Coating: Fusion Bonded Epoxy / 250 Microns

EN 545


Potable Water



EN 598

Water & Sewage



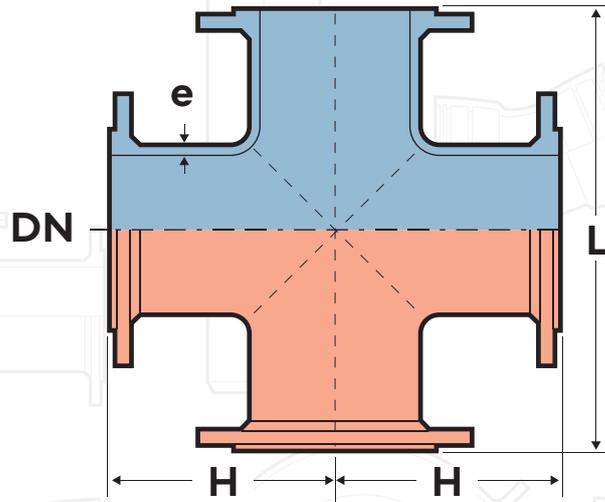

KEY DIMENSIONS

DN (mm)	Flange Drilling	L	H	WALL e	Weight (Kg)
80	PN16	330	330	7.0	21.0
100	PN16	360	360	7.2	25.0
150	PN16	440	440	7.8	41.0
200	PN16	520	520	8.4	61.0
250	PN16	700	700	9.0	100.0
300	PN16	800	800	9.6	143.0
350	PN16	850	850	10.2	189.0
400	PN16	900	900	10.8	286.0
450	PN16	950	950	11.4	341.0
500	PN16	1000	1000	12.0	370.0
600	PN16	1100	1100	13.2	542.0