

Backwater pumping station *Pumpfix F*

Installation in a concrete slab/floor

Made of polymer, with telescopic upper section for continuous height- and level adjustment.

For installation depth (D) from 486 – 640 mm, Installation area 750 × 750 mm

With surface water tight polymer cover plate class A 15 and integrated floor drain.

Installation kit with choice of cover.

Backwater pumping station according to EN 13564 Type 3 with pump (1kW/230V) and backwater valve, pump activates during backwater, suitable for wastewater with or without sewage.

Plug-and-Play control unit with connection option to building management system and alarm, display for operating status and battery back-up, protection type IP 54, with integrated self diagnosis system SDS, motorized backwater flap, *Pumpfix F* body rated protection type IP 68 (3 m, 24 h).

Power cable length: 5 m (15 m available on request).

Note:

With S1-pump, without macerator, capable for continuous operation: info@kessel.com (on request)



Accessories:

Extension sections for installation in waterproof concrete see page 36



Outer diameter Ø (mm)	L × H in mm	Art. no.
With recessed cover for on-site tiling and drain		
Ø 110	642 × 394	24 100X
Ø 125	645 × 387	24 125X
Ø 160	656 × 370	24 150X
Ø 200*	720 × 348	24 200X
With black cover and drain		
Ø 110	642 × 394	24 100S
Ø 125	645 × 387	24 125S
Ø 160	656 × 370	24 150S
Ø 200*	720 × 348	24 200S

Pumping capacity

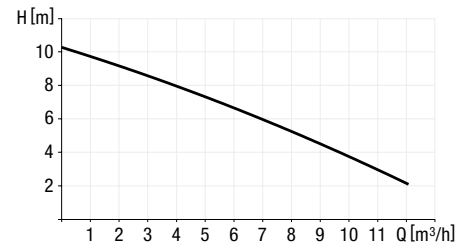

Z-53.2-388

* In-/Outlet Ø 200, hydraulics corresponds to Ø 160