


Backwater pumping station *Pumpfix® F Komfort* for installation in an exposed wastewater pipe

Illustration and dimensioned drawing

NEW

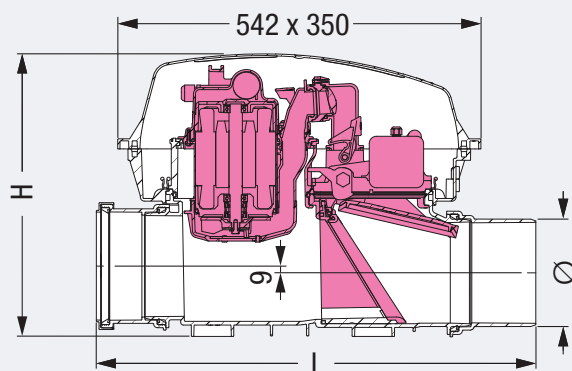

Article description

Backwater pumping station

Pumpfix® F Komfort

for wastewater with or without sewage

made of polymer

For installation in an exposed wastewater pipe.

With protective cover.

Backwater pumping station according to EN 13564 Type 3 with pump (1kW/230V) and backwater valve, use of pump when water backs up, suitable for wastewater with or without sewage. Plug-and-Play control unit with connection option to building management system and alarm, display for operating status and battery back-up, Protection type IP 54, with integrated self diagnosis system SDS, pump is rated submersible, motorized backwater flap, protection type IP 68 (3 m, 24h).

Power cable length: 5 m (15 m available on request).

Ø **110** L: 642 mm H: 422 mm

Ø **125** L: 645 mm H: 422 mm

Ø **160** L: 656 mm H: 422 mm

Ø **200** L: 720 mm H: 422 mm

Outer diameter Ø (mm)

Art.

Ø **110**

24100

Ø **125**

24125

Ø **160**

24150

Ø **200**

24200