



Adjustable counterflow for swimming training



NOT INCLUDING THE CONNECT PVC PIPE

01284 658770





Control switch


STP

Pump body in polypropylene.
Motor shaft in stainless steel AISI-304.
Impeller and seal mounting in PPO.
Mechanical seal in sic-sic.
Motor housing in aluminum L-2521.

Model	HP	kW	V		A		P1(kW)	Q	L/min m³/h	0	333.3	500	666.7	833.3	1000	1166.7	1333.3
			1~	3~	1~	3~				0	333.3	500	666.7	833.3	1000	1166.7	1333.3
			50HZ	50HZ	220	380				0	20	30	40	50	60	70	80
STP-2200(S)	3	2.2	220	380	13	4.9	2.8	H(m)	12	11.7	10.5	9.8	7.9	5.8	2.1		
STP-3000(S)	4	3		380		6.4	3.6		14.5	14.2	14	13.4	11.5	9.5	6.7		
STP-4000(S)	5.5	4		380		8.3	4.7		17	16.2	16	15.3	13.8	12.5	9.5	7.5	

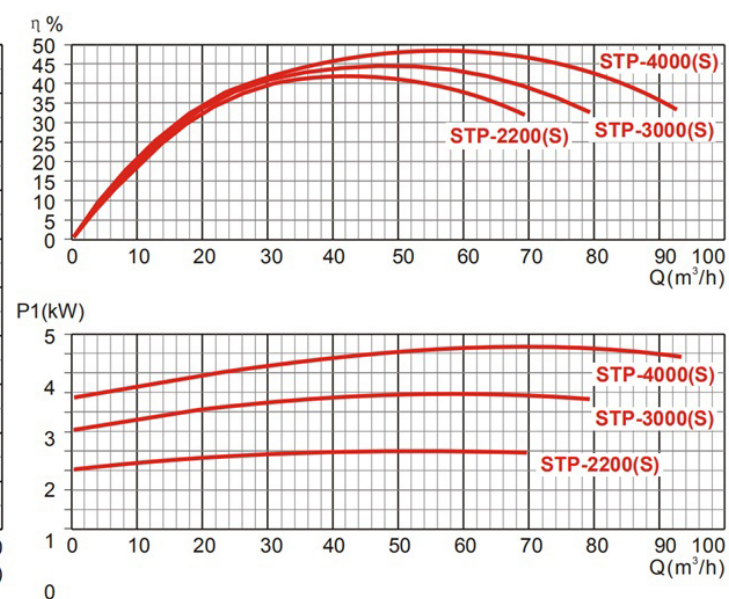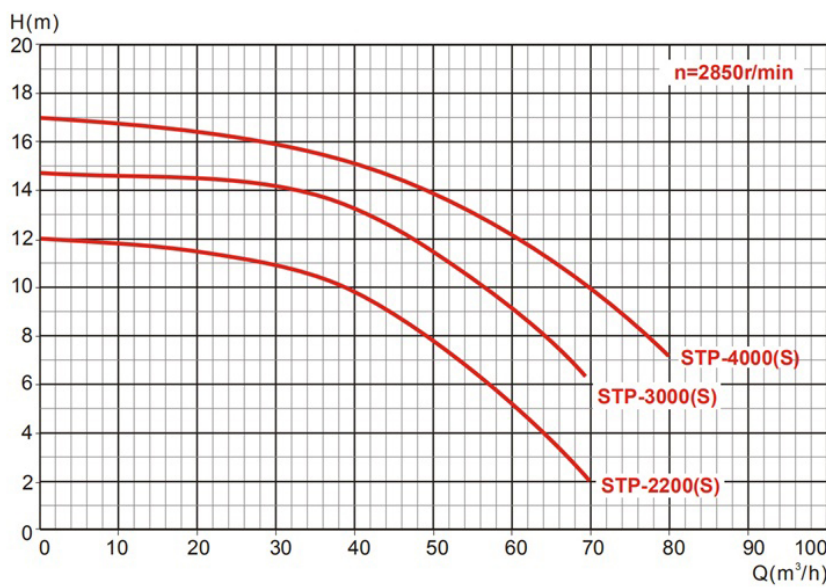

White PVC pipe and elbows not included

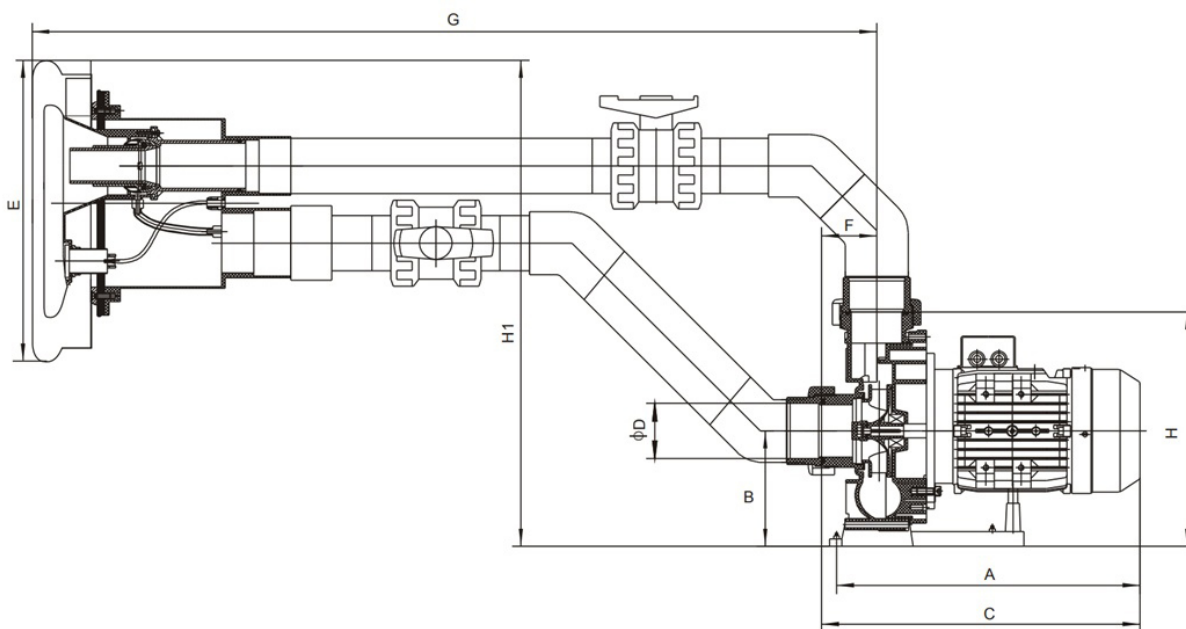


DIMENSION


Model	A	B	C	D	E	F	G	H	H1
STP-2200S	370	156	440	$\Phi 75$	395	77	1110	340	635
STP-3000S	410	156	470	$\Phi 75$	395	77	1110	340	635
STP-4000S	440	156	500	$\Phi 75$	395	77	1110	340	635

STP COUNTERGLOW JET


INSTALLATION IN CONCRETE SWIMMING POOLS

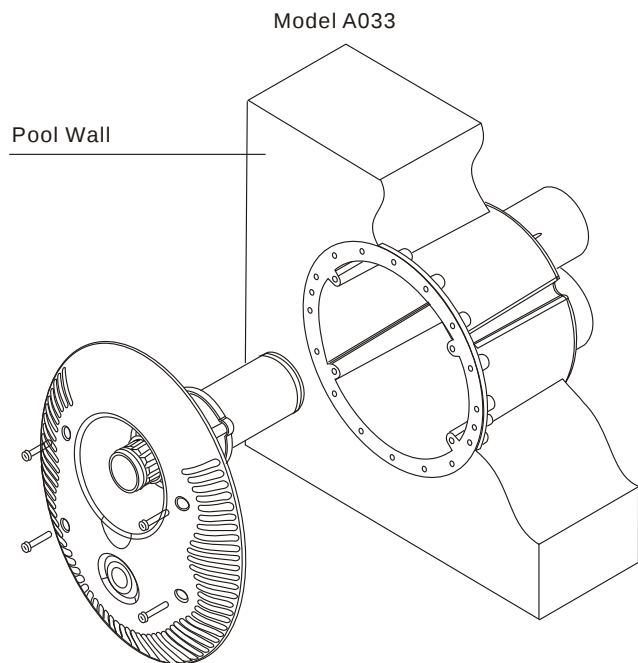


INSTALLATION IN CONCRETE SWIMMING POOLS WITH LINER

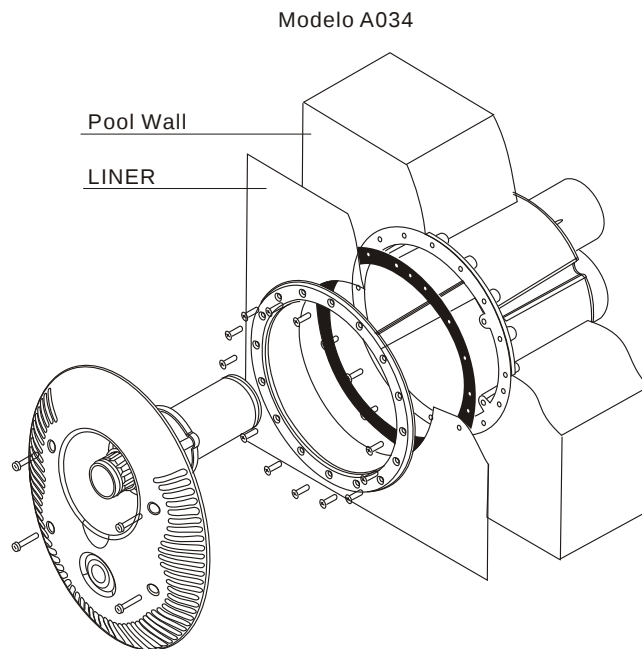

INSTALLATION IN PREFABRICATED SWIMMING POOLS

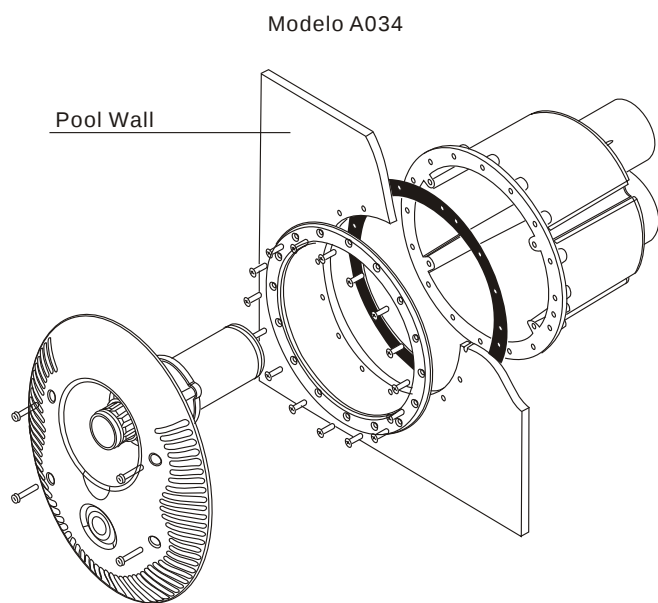

INSTALLATION IN PANELLED SWIMMING POOLS WITH LINER

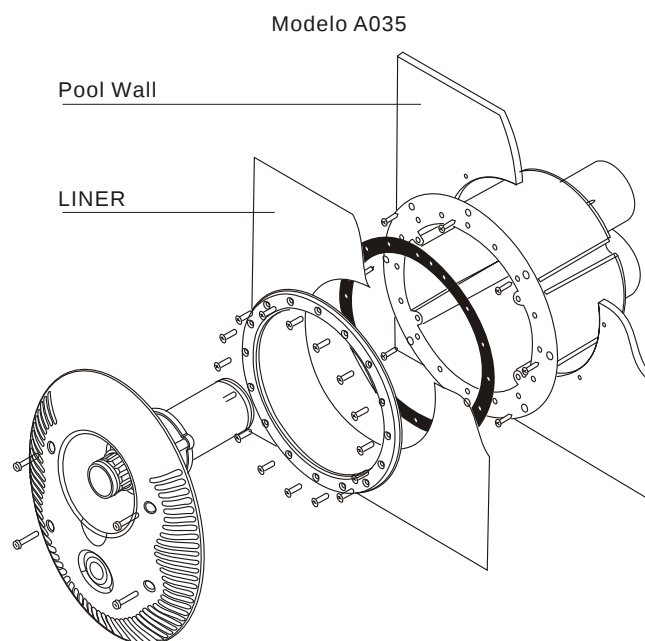

STP Series Explosion Diagram



DIAGRAM

[illegible]