

90° DUCKFOOT BEND | PN16

Automated Environmental Systems offers a wide range of flanged ductile iron fittings with epoxy coating both internally and externally

Product Description:

Double flanged 90° duckfoot bend, also known as 90° duckfoot elbow, suitable for water and sewage, providing long-term reliable performance

Features:

- Design: EN 545 clean water / EN 598 water and sewage
- Manufacturing: ISO 2531
- Thickness: Class K-12/14
- Flange drilling: ISO 7005-2
- Pressure rating: PN16
- Coating: Fusion Bonded Epoxy / 250 Microns

EN 545


Potable Water



EN 598

Water & Sewage



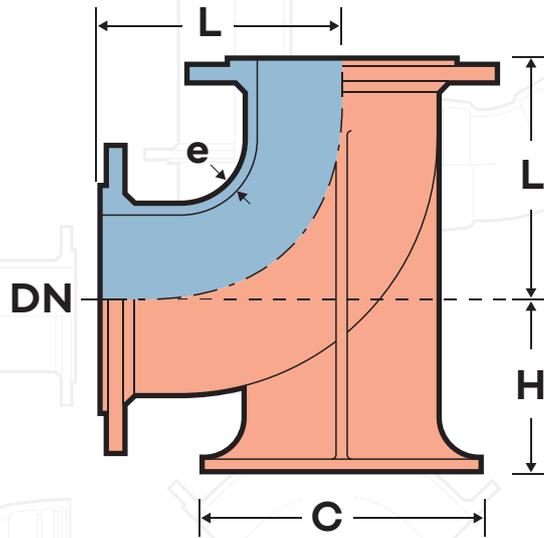

KEY DIMENSIONS

DN (mm)	Flange Drilling	L	H	C	e	Weight (Kg)
80	PN16	165	110	180	7.0	13.0
100	PN16	180	125	200	7.2	16.0
150	PN16	220	160	250	7.8	31.0
200	PN16	260	190	300	8.4	54.0
250	PN16	350	225	350	9.0	87.0
300	PN16	400	255	400	9.6	124.00
350	PN16	450	290	450	10.2	169.0
400	PN16	500	320	500	10.8	225.0
450	PN16	550	355	550	11.4	258.0
500	PN16	600	385	600	12.0	340.0
600	PN16	700	450	700	13.2	520.0
700	PN16	800	515	800	14.4	566.0
800	PN16	900	580	900	15.6	798.0
900	PN16	1000	645	1000	16.8	1050.0
1000	PN16	1100	710	1100	18.0	1380.0