

11.25° BEND | PN16

Automated Environmental Systems offers a wide range of flanged ductile iron fittings with epoxy coating both internally and externally

Product Description:

Double flanged 11.25° bend, also known as 11.25° elbow, suitable for water and sewage, providing long-term reliable performance

Features:

- Design: EN 545 clean water / EN 598 water and sewage
- Manufacturing: ISO 2531
- Thickness: Class K-12/14
- Flange drilling: ISO 7005-2
- Pressure rating: PN16
- Coating: Fusion Bonded Epoxy / 250 Microns

EN 545


Potable Water



EN 598

Water & Sewage



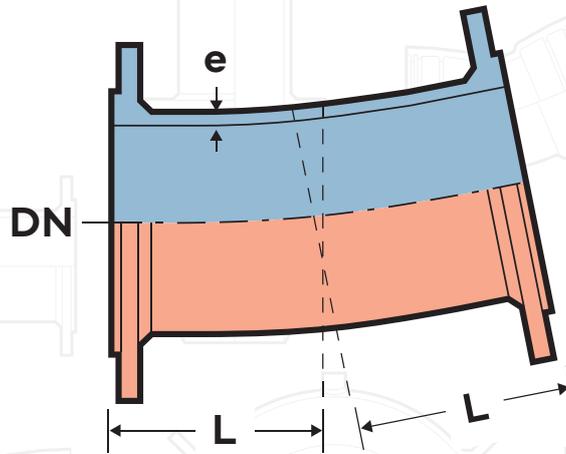

KEY DIMENSIONS

DN (mm)	Flange Drilling	L	L	e	Weight (Kg)
80	PN16	113	113	7.0	11.0
100	PN16	115	115	7.2	13.0
150	PN16	113	113	7.8	31.0
200	PN16	132	132	8.4	62.0
250	PN16	165	165	9.0	39.0
300	PN16	175	175	9.6	52.0
350	PN16	191	191	10.2	72.0
400	PN16	205	205	10.8	87.0
450	PN16	349	349	11.4	136.0
500	PN16	375	375	12.0	177.0
600	PN16	426	426	13.2	268.0
700	PN16	230	230	14.4	343.0
800	PN16	255	255	15.6	451.0
900	PN16	280	280	16.8	592.0
1000	PN16	310	310	18.0	778.0