

LEVEL INVERT TEE | PN16

Automated Environmental Systems offers a wide range of flanged ductile iron fittings with epoxy coating both internally and externally

Product Description:

All flanged level invert tee suitable for water and sewage, providing long-term reliable performance

Features:

- Design: EN 545 clean water / EN 598 water and sewage
- Manufacturing: ISO 2531
- Thickness: Class K-12/14
- Flange drilling: ISO 7005-2
- Pressure rating: PN16
- Coating: Fusion Bonded Epoxy / 250 Microns

EN 545


Potable Water



EN 598

Water & Sewage



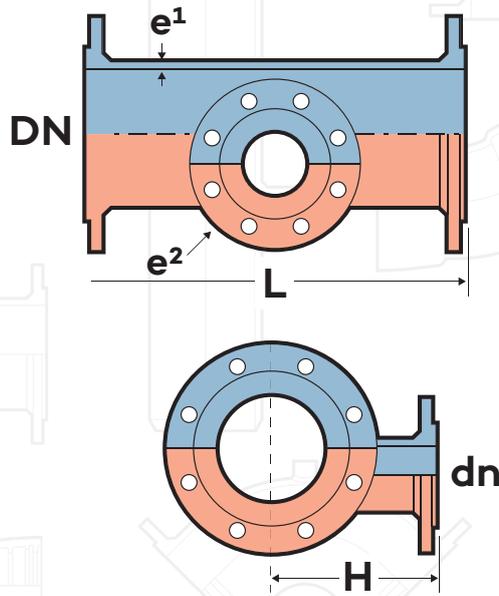

KEY DIMENSIONS

DN (mm)	dn (mm)	Flange Drilling	L	H	e ¹	e ²	Weight (Kg)
100	80	PN16	360	195	7.2	7.0	20.0
150	80	PN16	440	220	7.8	7.0	30.0
200	80	PN16	520	250	8.4	7.0	43.0
250	100	PN16	700	275	9.0	7.2	69.0
300	80	PN16	800	305	9.6	7.0	92.0
300	100	PN16	800	305	9.6	7.2	96.0
300	150	PN16	800	305	9.6	7.8	99.0
350	150	PN16	850	340	10.2	7.8	140.0
400	100	PN16	900	365	10.8	7.2	170.0
400	150	PN16	900	365	10.8	7.8	176.0
450	100	PN16	950	380	11.4	7.2	189.0
450	150	PN16	950	380	11.4	7.8	197.0
500	150	PN16	1000	400	12.0	7.8	267.0
600	150	PN16	1100	450	13.2	7.8	360.0
600	200	PN16	1100	450	13.2	8.4	370.0