

## RADIAL TEE | PN16

Automated Environmental Systems offers a wide range of flanged ductile iron fittings with epoxy coating both internally and externally

### Product Description:

All flanged radial tee, suitable for water and sewage, providing long-term reliable performance

### Features:

- Design: EN 545 clean water / EN 598 water and sewage
- Manufacturing: ISO 2531
- Thickness: Class K-12/14
- Flange drilling: ISO 7005-2
- Pressure rating: PN16
- Coating: Fusion Bonded Epoxy / 250 Microns

### EN 545


Potable Water



### EN 598

Water & Sewage



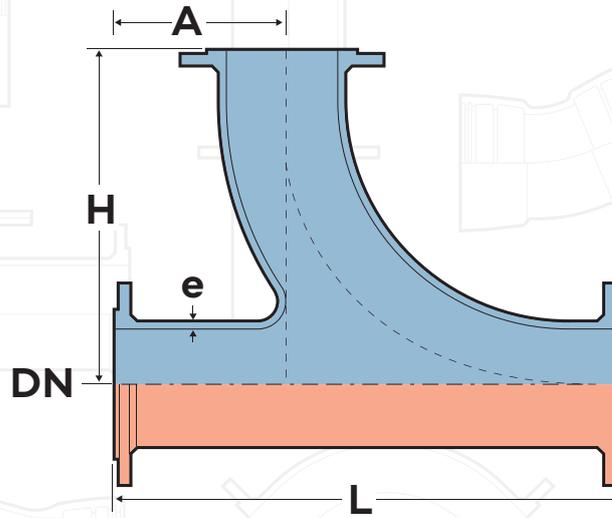

## KEY DIMENSIONS

DN (mm)	Flange Drilling	L	H	A	WALL e	Weight (Kg)
80	PN16	545	380	165	7.0	23.0
100	PN16	580	400	180	7.2	30.0
150	PN16	670	450	220	7.8	49.0
200	PN16	760	500	260	8.4	73.0
250	PN16	900	550	350	9.0	106.0
300	PN16	1000	600	400	9.6	146.0
350	PN16	1100	650	450	10.2	204.0
400	PN16	1200	700	500	10.8	298.0
450	PN16	1300	750	650	11.4	375.0
500	PN16	1400	800	600	12.0	423.0
600	PN16	1600	900	700	13.2	633.0