


ATALANTA MERLIN 351

3" x 3" General Purpose Self Priming Centrifugal Pump with Lombardini 15LD315 Diesel Engine

Dewatering (fresh & seawater) – Chemical Handling – Potable Water Supply

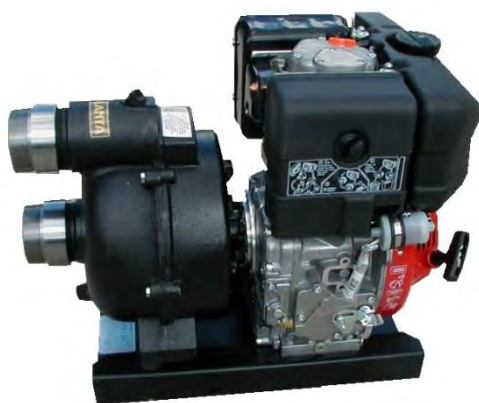

- Cast Iron Construction
- Rigid Monobloc Design
- Solids Handling to 18 mm Ø
- Integral Non Return Valve
- Self Priming to 7 m
- Carbon/Ceramic Mechanical Seal
- Screwed BSP Male Connections
- Fabricated steel baseplate with fixing holes.
- Many Options Including – Spares Kits
– Hoses – Trolley – Quick Couplings –
Case Packing

Powered by a Lombardini lightweight industrial air cooled single cylinder diesel engine model 15LD315 developing 4.5 kW at a nominal 3600 rpm complete with recoil start, (optional E – 12 volt electric start), 4.3 litre 4 hr. fuel tank, silencer, throttle, dry type air, oil and fuel filters. Set is supplied with Pump and Engine Operating and Instruction Manuals.

