



# REMORA FSF FILTER SET

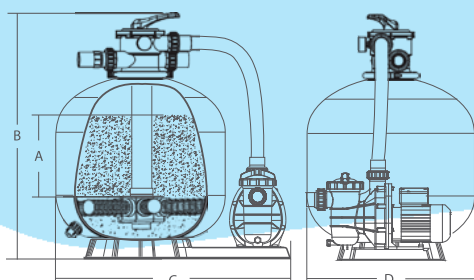

## KEY FEATURES

- Easy installation with pre-installed plumbing system and base
- Simple operation with six-way top mounted multi-port valve
- Choice of four sets, 14 to 20 inch filters with matched pumps
- Suitable for pools from 20m<sup>3</sup> to 60m<sup>3</sup>
- Sand size 0.5 – 0.8mm
- Maximum operating pressure 2.5 bar
- Fitted with UK plug (socket must be RCD protected)
- 1½ inch / 50mm stepped glue connections

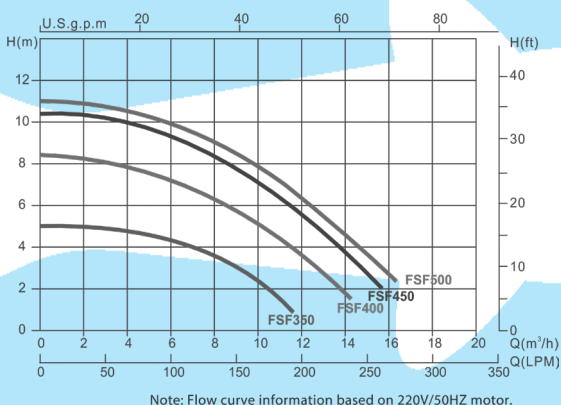

Model	Filter	Pump	Valve Connections	Sand (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Max. Flow Rate
FSF350	V350	SS033	1.5" / 50mm	20	160	680	555	355	72lpm 4.32m <sup>3</sup> /h
FSF400	V400	SS050	1.5" / 50mm	35	175	759	760	410	108lpm 6.48m <sup>3</sup> /h
FSF450	V450	SS075	1.5" / 50mm	45	210	813	760	455	135lpm 8.10m <sup>3</sup> /h
FSF500	V500	SC100	1.5" / 50mm	85	235	856	760	535	185lpm 11.10m <sup>3</sup> /h

## APPLICATIONS

Perfect upgrade to improve filtration and water quality or increase flow rate when adding a heat pump to above-ground swimming pools. Matched filter and pool pump mounted on skid base for easy installation, optional hose tails for easy connection of 32/38mm hose. Four filtration sizes to suit pools from 20m<sup>3</sup> to 60m<sup>3</sup>, can be easily removed and stored when pool not in use. Self-priming pump suitable for above and below ground pools, six-way multi-port valve with pressure gauge and integral sight glass.