



MOBILE AUTOMATIC COVER

MOOVE'O



Mobile solar automatic slatted cover for freeform pools




MOBILE AUTOMATIC COVER MOOVE'O

+ ACCESSIBILITY

- Covers all types of pool.
- The Moove'O cover operates without the need for rails, moving effortlessly in a straight line.
- This mobile cover can be positioned outside the bench, providing ample space around the pool whether it is rolled up on the shaft or fully extended.


+ CUSTOMISABLE

- Choose between 3 colours to match with your slats or your environment colour. The structure is available in white, grey or beige.



+ FINISHES

- All materials and component have been carefully selected for a perfect stability and an optimal rendering.

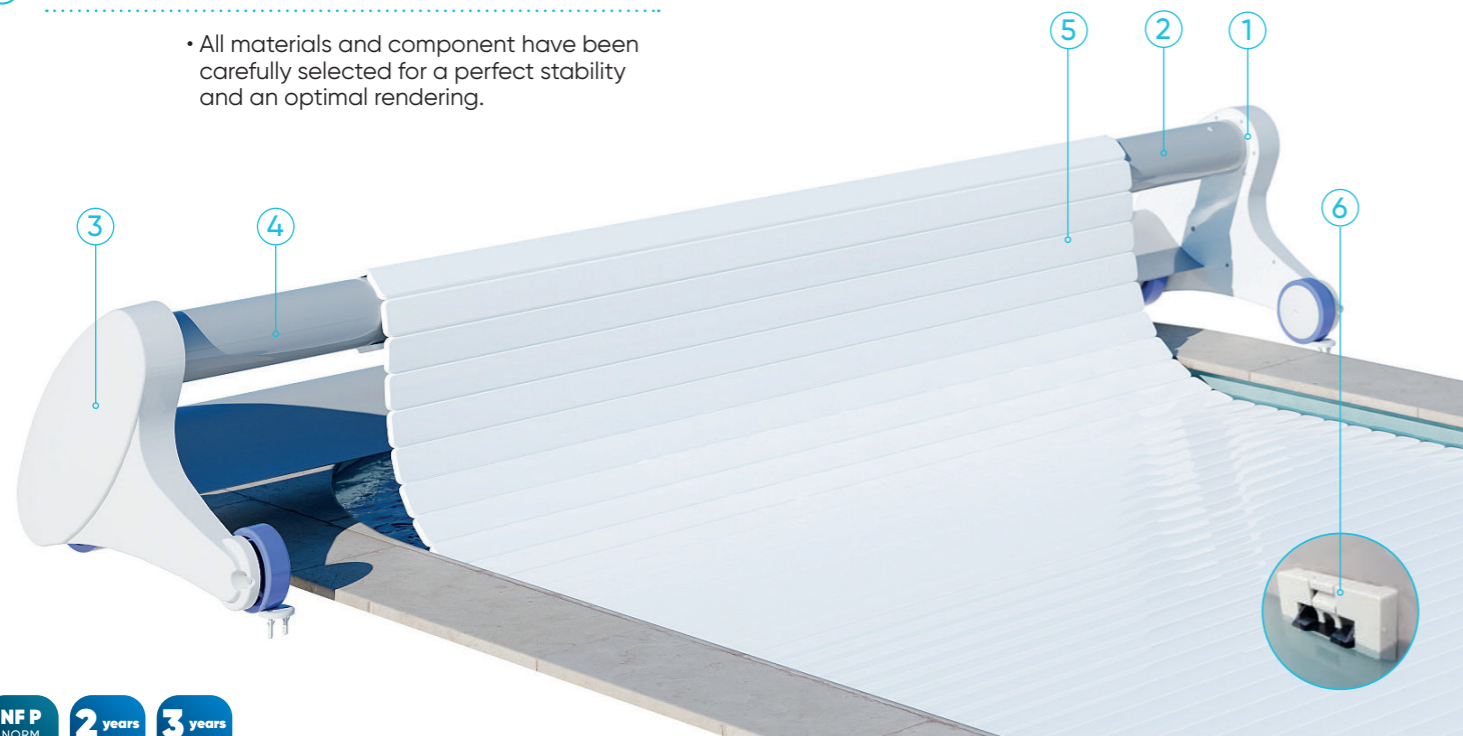

Cover available for pool from 2,00 x 3,00 m and up to 5,00 x 11,00 m.

1 KEY SWITCH

- For an opening and closing of the cover.

2 ALUMINIUM TUBE

3 STRUCTURE

- End-stands**
 - 3 and 4 mm stainless steel structure, white, beige or grey powder coated.
 - Composite guard.
- Central bar**
 - Lacquered aluminium
 - Allows water to flow to the pool.

- Solar panels**
 - Photovoltaic cells to power the motor.

Non-marking blue polymer wheels with brakes.

4 MOTORISATION

- Tubular electric motor:**
 - Adjustable mechanical limit switches.
 - Two 12 Vdc batteries and battery charger included.

5 SLATS

- Solar polycarbonate slats or opaque 69 PVC slats.

6 LOCKING KITS


Your slats choice

All our slats have a quality finish and are compliant with the NF P 90-308 standard.


Opaque PVC 84 slats



Opaque PVC 69 slats



Solar polycarbonate slats



Why cover your pool?

- To reduce the water consumption by limiting the evaporation.
- To reduce the energy consumption.
- To make the cleaning easier & to reduce the use of chemical products.

USEFUL TO KNOW

Choose solar polycarbonate slats to heat your pool water.



Read carefully and keep for future reference.

The Moove'O mobile automatic slatted cover is a swimming pool safety cover designed to prevent children under 5 years of age from accessing the pool. This product complies with the NF P90-308 standard. It is no substitute for common sense or individual responsibility. It is not intended either to be a substitute for parental and/or adult supervision, which is the essential factor for the protection of young children. A child can get drowned within less than 3 minutes; no type of protection will ever replace the vigilance and supervision of responsible adults.

Warranty: 2 years for the reel system and 3 years for the motor. 3 years for opaque PVC slats and 5 years for solar polycarbonate slats, in accordance with our general sales terms.

Order form: to have a cover correctly adjusted to the pool, it is essential to provide a drawing of the pool with measurements taken every 1 meter. In accordance with the standard NF P90-308, the gap between the inside of the pool and the edge of the cover must be less than 70 mm.

Operating time: for a pool of 5,00 x 10,00 m : 3 minutes for the automatic opening or closing and 30 seconds for the locking or unlocking of the safety kits. One person only can do the opening and closing of the Moove'O.

Use: for all seasons. For a proper functioning, maintain a constant water level corresponding to a normal filtration of the pool. It is essential to have a water level regulator. The water level has to comply with the technical notice.

Use limits: DEL automatic slatted covers used on overflow pools can comply with the French Safety Standard only if the pool is equipped with a device such as the Infinity control box that automatically lowers the water level by at least 2 cm when the automatic slatted cover is closed on the pool. The installation of a DEL mobile automatic cover on overflow pools and/or with a stair along the length (detachable side stair) does not comply with the standard NF P90-308. Unless otherwise specified by the manufacturer, under water alarms are not compatible with DEL covers.

Wintering: the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering net to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

Packing list: for a swimming pool measuring 5,00 x 10,00 m. Slats: 5 packages: 5,10 x 0,25 x 0,20 m - 250 kg / Moove'O: 1 package: 5,90 x 0,80 x 0,70 m - 90 kg / Total weight: 340 kg.

DON'T FORGET

Protect your slats from
UVs and dirt
with the Ivernea winter shift
or the Ivernea Plus 4-season
protective shift.

FOR MORE INFORMATION, PLEASE ASK YOUR POOL EXPERT

Automated Environmental Systems
Unit B, Anglian Lane, Bury St. Edmunds, IP32 6SR
01284 658770
sales@automatedenvironmentalsystems.co.uk



a brand by

