

SUBMERSIBLE PUMPS

JS/T DRAINER ALL 316 STAINLESS STEEL PUMPS

A

Precision cast 316 stainless steel drainer pumps. Elastomers and O rings are made from Viton. Side vertical outlet, twin Viton mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Complete with 10 metres of power cable. Hose tails are supplied with all 2" and 3" models. Suitable for effluent waste water, corrosive liquids and chemical sumps, check for compatibility. Automatic pumps fitted with MAC-3 floats, allow approx 300mm away from the pump to operate correctly. See pages 78-81 for control panels and 88-89 for float switches.

Features

- S/Steel Pump Body
- S/Steel Impeller
- Max Solids 6mm

Applications


- Light Chemical Waste
- Heavy Duty
- Clean Water
- Dirty Water
- Drainage



JS400SS



JST22SS

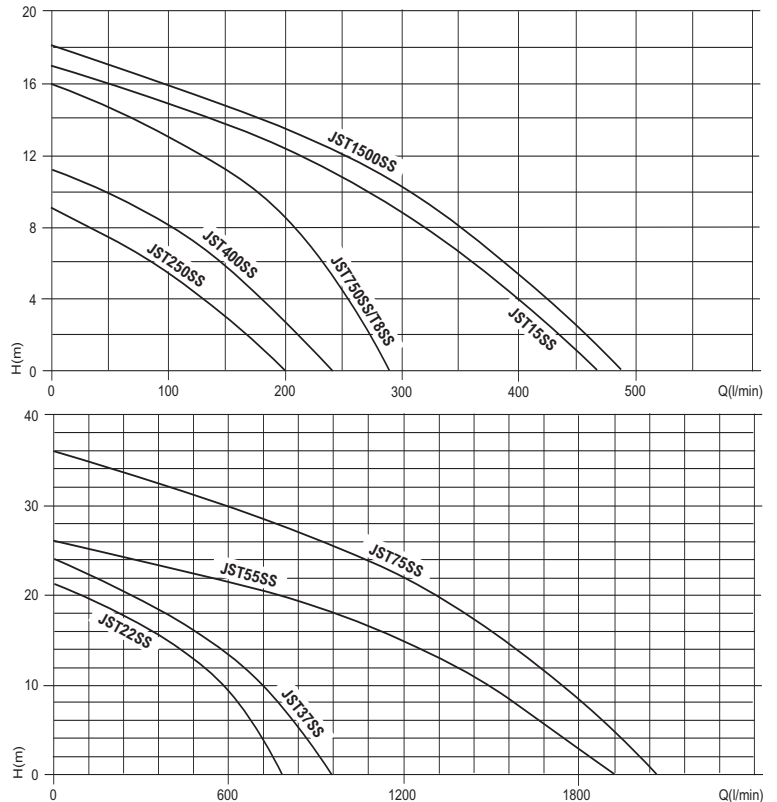

| MODEL | VOLT | OUTLET | LM/HM | Kw | AMP | H x W x L mm | Kg | CODE |
|----------------------|------|--------|-----------|------|------|-----------------|----|---------|
| JS-250SS MANUAL | 230v | 1½" | 200/9.5 | 0.25 | 1.9 | 370 x 150 x 220 | 12 | 011-300 |
| JS-250SS MANUAL | 110v | 1½" | 200/9.5 | 0.25 | 4 | 370 x 150 x 220 | 12 | 011-304 |
| JS-400SS MANUAL | 230v | 2" | 240/11.5 | 0.4 | 3.8 | 420 x 150 x 220 | 15 | 011-308 |
| JS-400SS MANUAL | 110v | 2" | 240/11.5 | 0.4 | 7.6 | 420 x 150 x 220 | 15 | 011-312 |
| JS-400SS MANUAL 60Hz | 230v | 2" | 240/11.5 | 0.4 | 3.8 | 420 x 150 x 220 | 15 | 011-316 |
| JS-750SS MANUAL | 230v | 2" | 295/16 | 0.75 | 6.8 | 480 x 195 x 255 | 26 | 011-320 |
| JS-750SS MANUAL | 110v | 2" | 295/16 | 0.75 | 13.0 | 480 x 195 x 255 | 26 | 011-324 |
| JS-1500SS MANUAL | 230v | 3" | 485/18 | 1.5 | 12 | 510 x 195 x 285 | 32 | 011-328 |
| JST-8SS | 400v | 2" | 295/16 | 0.75 | 1.8 | 420 x 190 x 310 | 24 | 011-332 |
| JST-15SS | 400v | 3" | 465/17.5 | 1.5 | 3.2 | 440 x 190 x 260 | 28 | 011-336 |
| JST-22SS | 400v | 3" | 780/21 | 2.2 | 4.6 | 510 x 220 x 315 | 39 | 011-340 |
| JST-37SS | 400v | 4" | 965/24 | 3.7 | 7.9 | 525 x 220 x 320 | 44 | 011-344 |
| JST-55SS | 400v | 4" | 1920/26 | 5.5 | 11.5 | 640 x 280 x 500 | 66 | 011-348 |
| JST-75SS | 400v | 6" | 2065/35.5 | 7.5 | 15.2 | 720 x 280 x 500 | 76 | 011-352 |

JS SINGLE PHASE MODELS CAN BE MODIFIED FOR AUTOMATIC OPERATION

| TYPE | CODE |
|-------------------|---------|
| MAC3 (ALL MODELS) | 020-001 |
| AGMA* | 020-003 |



MAC3



AGMA

*Not recommended for JS-750 110v or JS-1500 230v.