

FOR POOLS
up to **150m³**

OPERATES
down to **-7°C**

7 versions
available

POOLEX
FOLLOW THE EXPERT
SILENT JET Fi



SILENT JET Fi

It knows how to be discreet

- New Rear Blowing Technology
- Full Inverter Compressor + Fan
- Ultra Silent
- Sleek Contemporary Design

HEAT PUMP WARRANTY

3
YEARS

COMPRESSOR WARRANTY

7
YEARS


TITANIUM COIL
WARRANTY AGAINST CORROSION

15
YEARS

	60	90	120	160	210	160 Tri	210 Tri
Volumen de la piscina	35-50m ³	50-70m ³	65-85m ³	80-115m ³	115-150m ³	80-115m ³	115-150m ³
COP air 15°C /water 26°C	7.5~4.7	7.2~4.7	7.6~4.9	7.7~4.8	7.8~4.7	7.9~5.0	7.8~4.7
Noise level at 10 m (db(a))	19~28	19~29	20~30	21~31	23~35	21~31	23~35



Rear blowing



Integrated WiFi

FOR POOLS
up to **150m³**

OPERATES
down to **-7°C**

7 versions
available

E.U. STANDARD
T.U.V. STANDARD

SILENT JET Fi		60	90	120	160	210	160 TRI	210 TRI
Swimming pool volume		35-50 m³	50-70 m³	65-85 m³	80-115 m³	115-150 m³	80-115 m³	115-150 m³
Reference: PC-SLT		060	085	120	160	210	160T	210T
Air 26°C Water 26°C Hygro 80%	Max. power output (kW)	7.8	12.5	15.5	21.5	27	22	27
	Min. power output (kW)	2.46	2.2	2.4	3.3	4.3	3.3	4.3
	COP	13.5~6.1	16.5~6.1	16~6.5	16.7~6.2	16.5~6.3	17.1~6.6	16.5~6.3
Air 15°C Water 26°C Hygro 70%	Max. power output (kW)	6.1	9.05	11.5	16.0	20.5	16.0	20.5
	Min. power output (kW)	1.4	1.6	1.9	2.48	3.2	2.6	3.2
	COP	7.5~4.7	7.2~4.7	7.6~4.9	7.7~4.8	7.8~4.7	7.9~5.0	7.8~4.7
Power supply		230V / 50Hz					380~415V/3 Ph/50Hz	
Heating temperature range		20°C~40°C						
Cooling temperature range		8°C~28°C						
Operating range		-7°C~43°C						
Flow (m ³ /h)		2~4	4~6	5~7	7~9	9~11	7~9	9~11
Circuit breaker(A)		10	16	20		25	10	
Electrical Cable diameter (10m)		R02V 3x2,5 mm ²			R02V 3x4 mm ²	R02V 3x6 mm ²	R02V 5x2,5 mm ²	
Refrigerant		R32						
Packaging dimensions (mm)		944*420*802	1043*440*802	1147*454*882			1279*484*972	
Dimensions (mm)		870*355*622	975*376*622	1040*406*722			1060*436*822	
Net weight (kg)		46	56	69	73	92	89	92
Noise level at 1 m (dB(A))		37~49	38~50	39~51	40~52	45~56	40~52	45~56
Noise level at 10 m (dB(A))		19~28	19~29	20~30	21~31	23~35	21~31	23~35
Compressor type		Hermetic DC rotary inverter compressor						
Compressor brand		Toshiba						
Exchanger		Twisted Tech© Titanium						
Function		Heating, cooling, automatic						

Full Inverter R32 Technology



Reduces electric consumption by **30%** compared to On/Off technology.

WiFi Connection




Manage your HP directly from your smartphone

Check water temperature and operating modes in real time



INNOVATION 2021


New rear blowing architecture

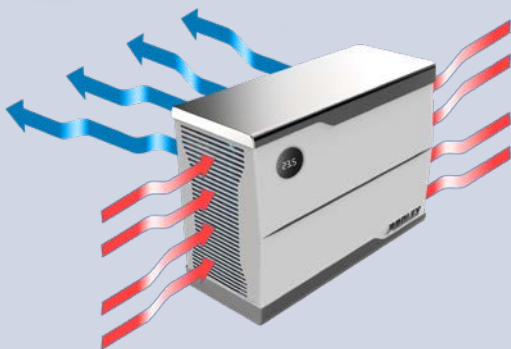

Finished the flow of cold air from the front thanks to the rear blower. This solution makes it possible to significantly reduce the acoustic pressure while maintaining first-rate performance. This architecture, coupled with Full Inverter technology, makes this heat pump almost completely silent.

Ultra silent

18dB(A)
at 10m



Coupling Full Inverter technology with the new rear blowing architecture, the Silent Jet Fi reaches a level of silence never before achieved for a swimming pool heat pump.

The POOLEX + : all accessories included



Delivered on wooden pallet



PVC Connectors
Ø 50mm 1" 1/2



Anti-vibration support kit



Condensation drainage pipe



Winter storage cover



Multi-language user manual

